

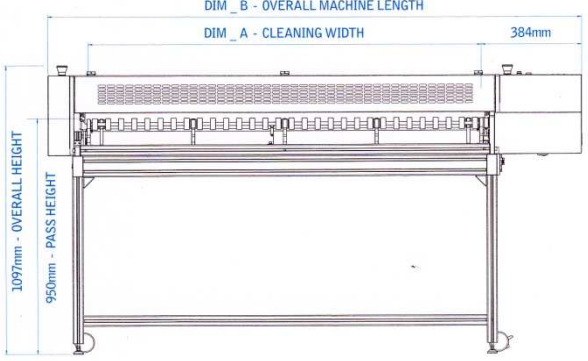
teknek

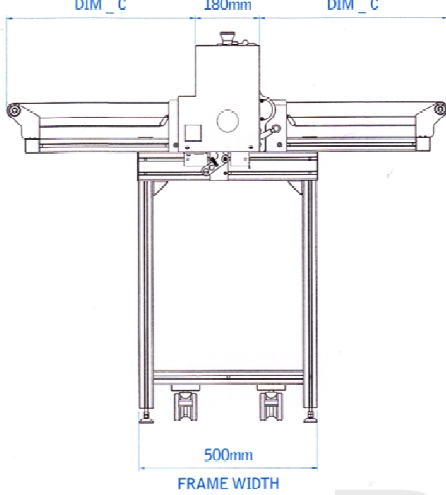
TEKNEK CM10 CLEAN MACHINE

CM10



	Machine unit description TEKNEK Beuerlein	Page 10-02
CM10		

TECHNICAL SPECIFICATION 	Maschine/ Machine	DIM_A	DIM_B
	CM10-1500	1500mm	2040mm
	CM10-1200	1219mm	1175mm
	CM10-1000	1000mm	1540mm

	Förderband Typ/ Conveyor Type	DIM_C
	'1500' Langes Band/ '1500' Long Tape	1528
	'1000' Langes Band/ '1000' Long Tape	1028
	'800' Langes Band/ '800' Long Tape	828
	'500' Langes Band/ '500' Long Tape	528
	Stubby Band/ Stubby Tape	286

SPECIFICATION

In 3 Reinigungsbreiten verfügbar/Available in 3 cleaning widths	1000 - 1200 - 1500
Arbeitsgeschwindigkeitsoptionen/Processing speed options	3-12m/min & 10-40m/min*
Betriebsarten/Mode of Operation	Uni-Directional & Auto Reverse
Förderbandoptionen/Conveyor Options	Refer to attached drawing information
Arbeitshöhe/Pass line height	150 + 50 mm
Stromversorgung/Power supply	Selectable - 100-230 V 50/60hz
Pneumatischer Druck benötigt/Pneumatic pressure required	5-7 Bar or Free Air

* Speeds outwith the started figure above available through our "RFQ" Request for Quotation process

	Machine unit description	Page
CM10	TEKNEK Beuerlein	10-02

T01 Gummiwalzen/ Elastomer Rollers 	T02 Kleberollen/ Adhesive Rolls 		
---	--	--	--