

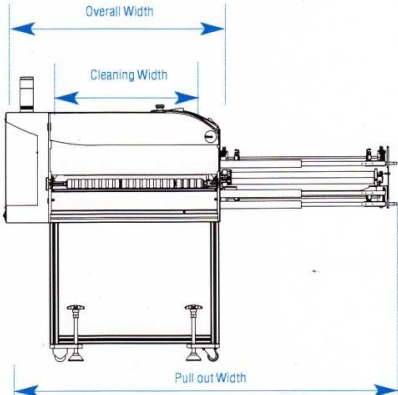
teknek

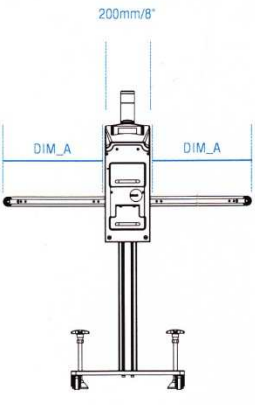
TEKNEK CM8 CLEAN MACHINE

CM8



	Machine unit description TEKNEK Beuerlein	Page 8-02
CM8		

TECHNICAL SPECIFICATION 	Maschine/ Machine	Reinigungsbreite/ Cleaning Width	Gesamtbreite/ Overall Width	Auszugsbreite/ Pullout width
	CM8-300	320mm	724mm	1511mm
	CM8-600	622mm	1026mm	1813mm
	CM8-650	650mm	1026mm	1813mm
	CM8-750	762mm	1166mm	1953mm
	CM8-1000	1000mm	1404mm	2191mm

	Förderband Typ/Conveyor Type	DIM_A
	Standard Band/Standard Tape	450mm
	Standard Scheibe/Standard Disc	470mm
	Stubby Band/Stubby Tape	127mm
	Standard Scheibe/Standard Disc	131mm

SPECIFICATION

In 5 Reinigungsbreiten verfügbar/Available in 5 cleaning widths	300 – 600 – 650 – 750 – 1000
Betriebsarten/Operating modes	Uni-Directional & Auto Reverse **
Arbeitsgeschwindigkeit/Processing speed	1 – 40 m/min
Statikbeseitigung/Static elimination	Uni-1 Bar, Auto-2 Bar
Arbeitshöhe/Pass line height	900 or 1000 +/- 50 mm
Stromversorgung/Power supply "Universal"	85 – 264 V AC
Luftzufuhr benötigt/Air supply required	5 – 7 bar "Oil free air"

** Different modes of operation are available on request

	Machine unit description TEKNEK Beuerlein	Page 8-02
CM8		

T01 Gummiwalzen/ Elastomer Rollers 	T02 Kleberollen/ Adhesive Rolls 		
---	--	--	--